Willow Creek Bridge Renewal

General arrangement and deck drainage geometry

CLIENT / OWNER	Prairie County Transportation (fictional)
DOCUMENT / REVISION	WC-DD-101 / P01 - preliminary
LOCATION / STATUS	Rural Alberta - fictional site / demonstration concept

Alignment and deck section

The bridge is on a straight tangent horizontal alignment and is not super-elevated. The proposed deck crossfall is 1.0% away from the crown on both sides. The 8.0 m carriageway comprises two 3.5 m lanes and two 0.5 m shoulders.

Longitudinal profile

The proposed longitudinal deck grade is 0.35% over the 24 m span. The profile has a constant grade with no crest curve on the deck. This geometry reflects the owner approach-earthworks constraint and is subject to acceptance.

Structural concept

Four longitudinal steel girders support the cast-in-place deck. Girder spacing is 2.4 m, with 0.6 m deck overhangs beyond the outside girder centrelines. Structural sizing, foundation design and load rating are not established by this concept.

Drawing status

Revision P01, 6 November 2026. Synthetic demonstration drawing. Not for construction. Geometry is for coordinated preliminary review only.

Willow Creek Bridge Renewal

Concept detail - not to scale

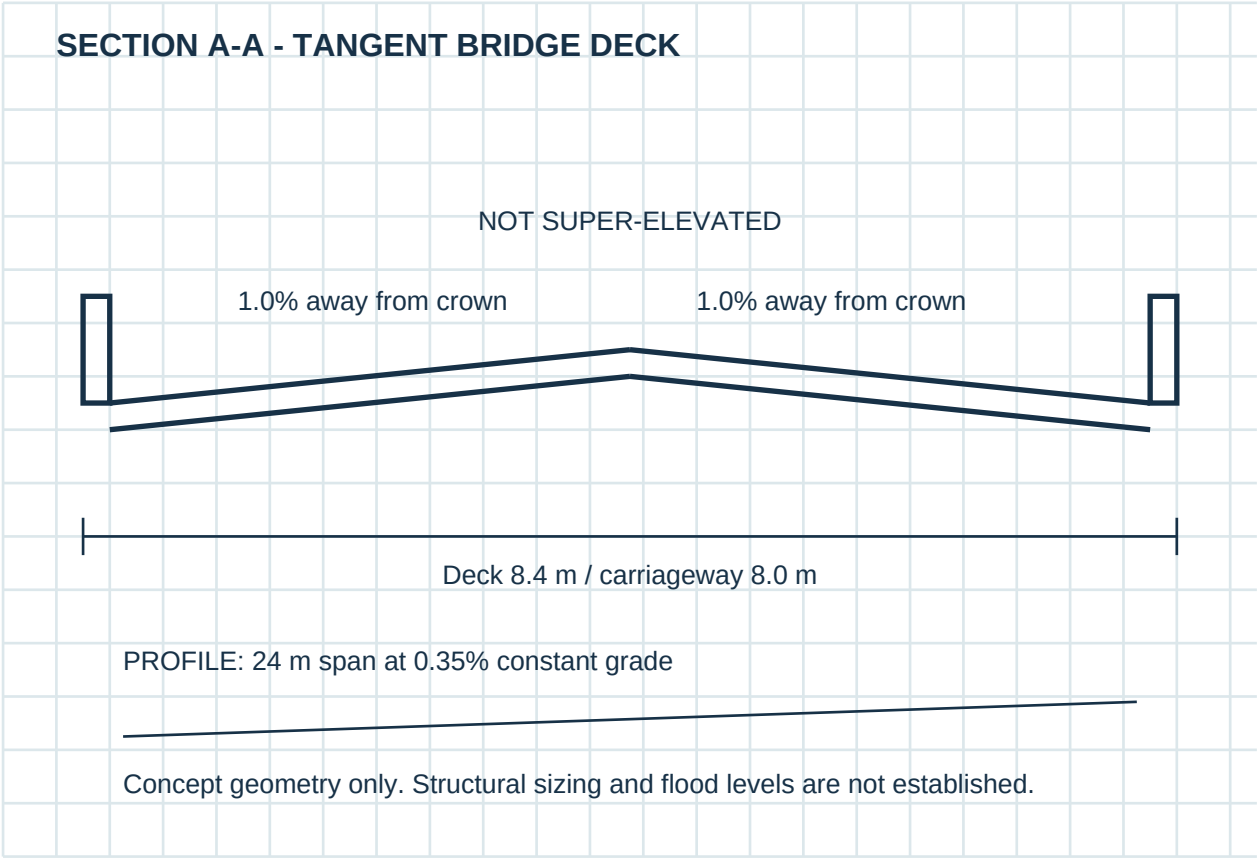

Synthetic coordination sketch. Read with the schedule and review hold points on page 1. Dimensions are concept assumptions, not proof of an accepted design.