Parkview Exchange Redevelopment

C201 · Site grading plan

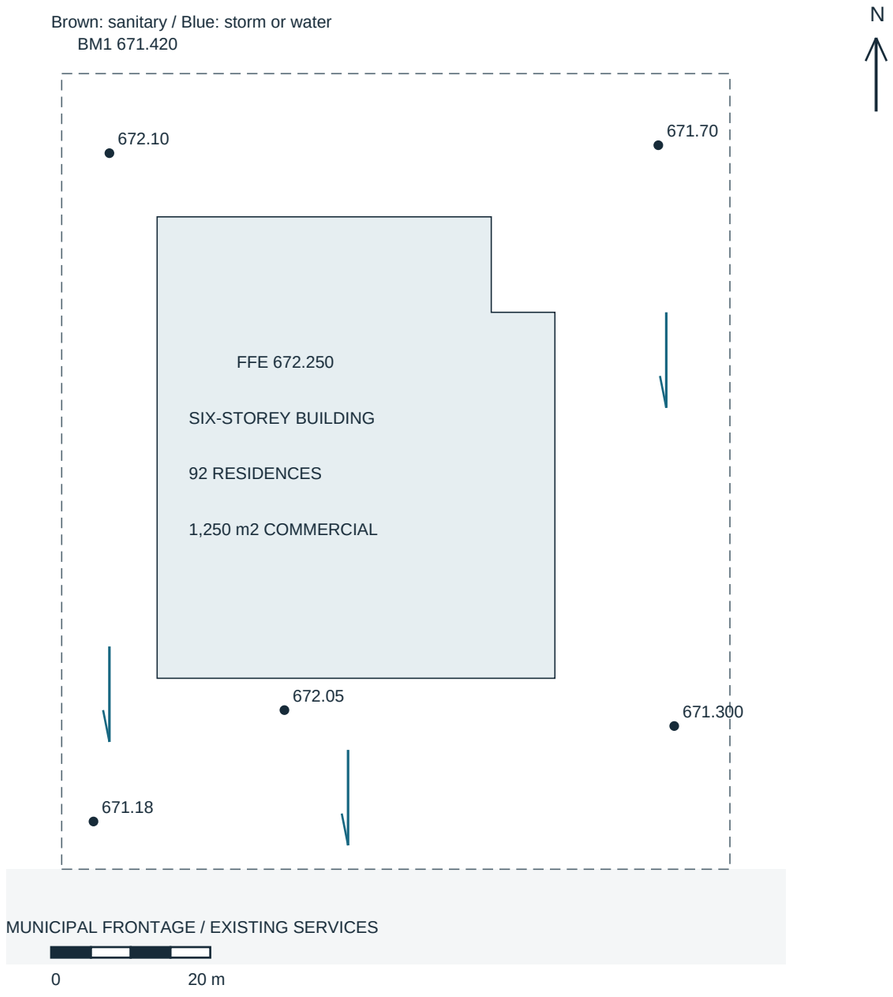

Figure 1 - Local coordination layout; dimensions in metres

DESIGN NOTES

Proposed finished floor elevation is 672.250 m. Benchmark BM1 is 671.420 m. Existing ground ranges from 670.85 m to 672.10 m. Proposed east corridor grade at ST1 0+018 is 671.300 m.

Preliminary spot grades route surface drainage away from the building to the frontage drainage route. Barrier-free transitions, overland capacity and adjacent-property tie-ins require detailed review.

Issue	Status
0 / 2026-10-02	Issued for review
Prepared / checked	JL / AK
Units	SI; elevations in metres

Reference: associated project memorandum and original standards

Parkview Exchange Redevelopment

C202 · Storm cover and crossing details

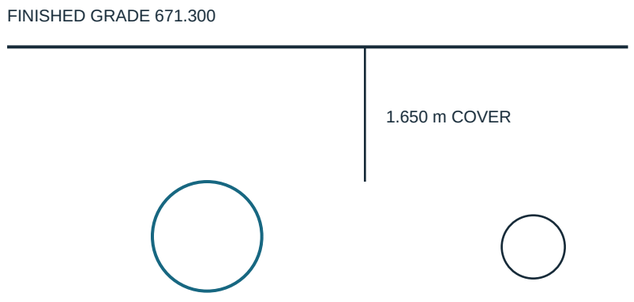

DESIGN NOTES

ST1 at 0+018: finished grade 671.300 m; outside crown 669.650 m; cover 1.650 m. Insulation is not detailed. Confirm whether revised levels or an adequate insulation detail will resolve the shallow installation.

X1: S2 sewer service outside crown 668.380 m below watermain underside 668.600 m; vertical clearance 0.220 m. Detail is schematic, NTS; confirm buried elevations before finalizing the crossing.

Issue	Status
0 / 2026-10-02	Issued for review
Prepared / checked	JL / AK
Units	SI; elevations in metres

Reference: associated project memorandum and original standards