Mill Creek Corner Infill

Preliminary drainage layout and planter section

CLIENT / OWNER	Rivermark Developments
DOCUMENT / REVISION	MC-DD-101 / P01 - preliminary
LOCATION / STATUS	Bonnie Doon, Edmonton / concept review

Planter schedule - concept P1/P2

Two box planters are proposed, each 20 m long with an overall width of 400 mm. Nominal wall thickness is 50 mm. The concept provides 600 mm of soil media, a 350 mm drainage layer and a 200 mm surface ponding zone. These dimensions require review against the adopted guidelines.

Connection detail C1

The proposed 100 mm perforated underdrains join at J1 and discharge through a 150 mm lateral to the existing combined sewer at C1. This is the current concept route, not an approved connection.

Surface overflow

Surface overflow is directed away from the dwellings to the shared side-yard swale and public right-of-way. Final lot grading, receiving levels and erosion protection remain to be coordinated.

Drawing status

Revision P01, 6 November 2026. Preliminary concept drawing. Not for construction. All lengths and levels are concept assumptions; no municipal acceptance is represented.

Mill Creek Corner Infill

Concept detail - not to scale

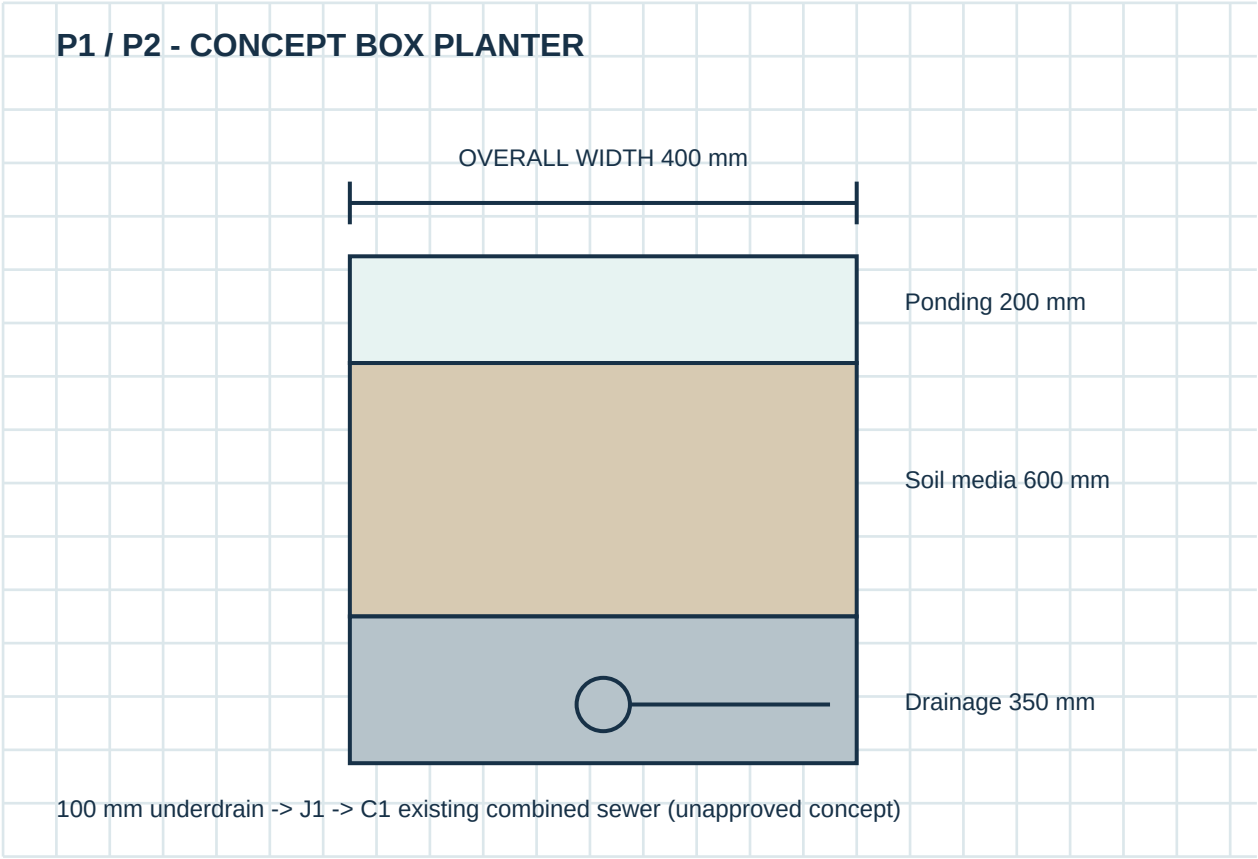

Synthetic coordination sketch. Read with the schedule and review hold points on page 1. Dimensions are concept assumptions, not proof of an accepted design.