Parkview Exchange Redevelopment

C101 · Site servicing plan

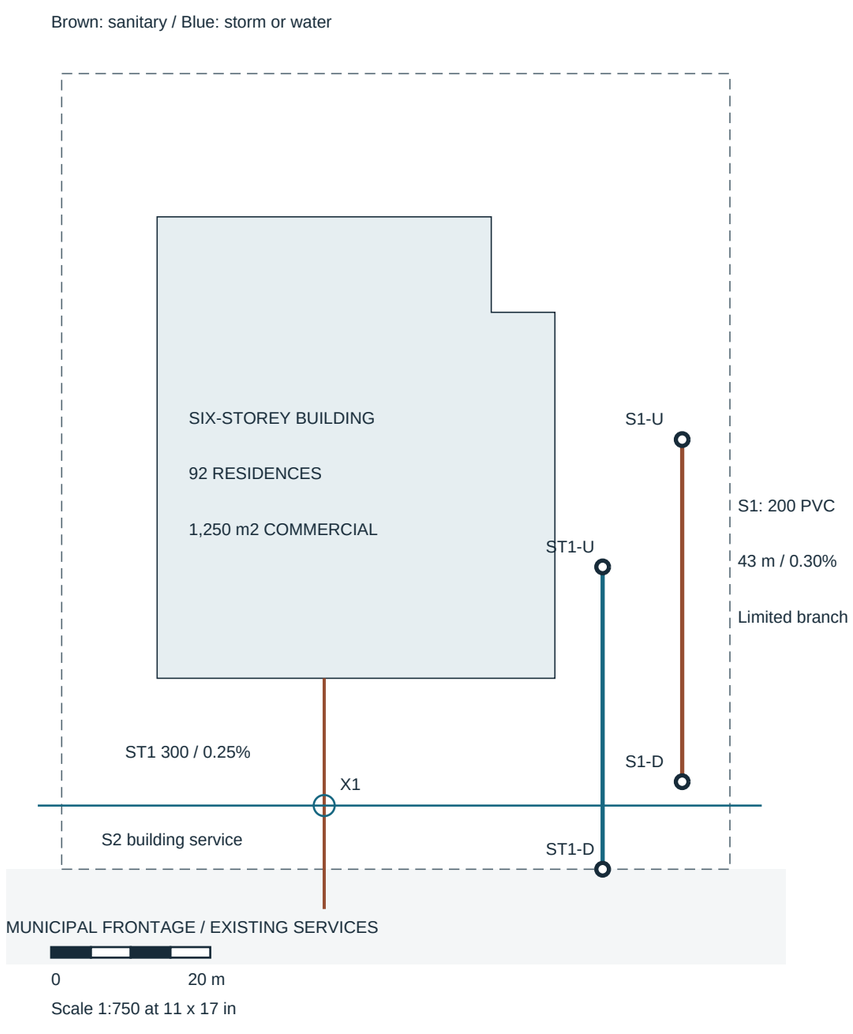

Figure 1 - Local coordination layout; dimensions in metres

DESIGN NOTES

S1 is a 200 mm PVC upstream sanitary reach, 43 m long at 0.30% grade, with peak DWF 0.34 L/s. S1 serves only the 250 m² east retail/frontage component. S2 separately serves the 92 residences and remaining 1,000 m² commercial area.

ST1 is the most upstream storm reach, from the terminal maintenance hole to the first downstream maintenance hole: 300 mm nominal diameter, 38 m long at 0.25% grade.

Issue	Status
0 / 2026-10-02	Issued for review
Prepared / checked	JL / AK
Units	SI; elevations in metres

Reference: associated project memorandum and original standards

Parkview Exchange Redevelopment

C102 · Utility profile

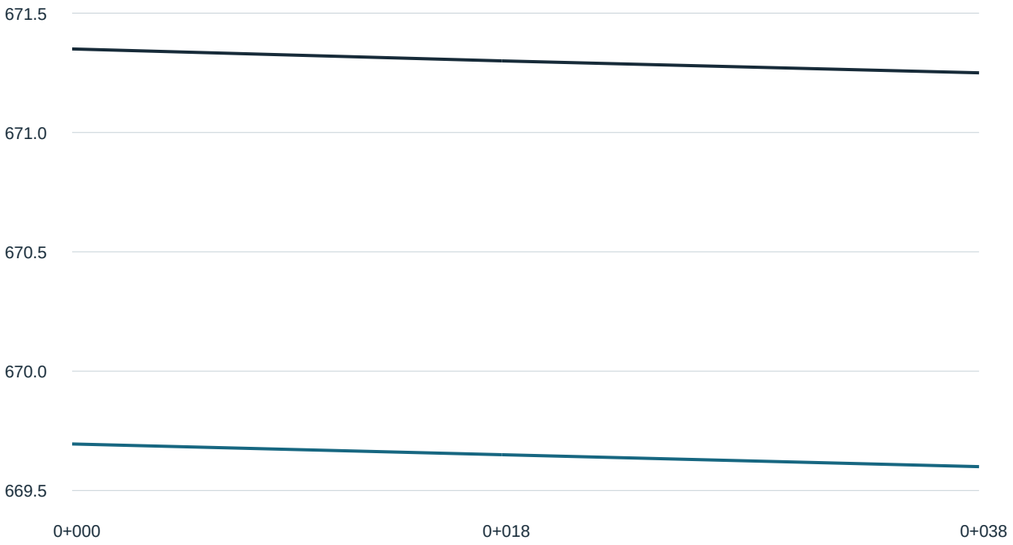

ST1 outside crown / 0.25%

H 1:250 / V 1:25 at 11 x 17 in

Figure 2 - ST1 profile; levels in metres

DESIGN NOTES

At ST1 chainage 0+018, finished grade is 671.300 m and outside pipe crown is 669.650 m, providing 1.650 m cover. No insulation detail is included in this issue.

At crossing X1, sewer service S2 passes below the watermain with 0.220 m vertical clearance between outside surfaces. Water underside 668.600 m minus sewer crown 668.380 m equals 0.220 m.

Issue	Status
0 / 2026-10-02	Issued for review
Prepared / checked	JL / AK
Units	SI; elevations in metres

Reference: associated project memorandum and original standards