North Ridge Highway Intersection Upgrade

TA101 · Construction stages

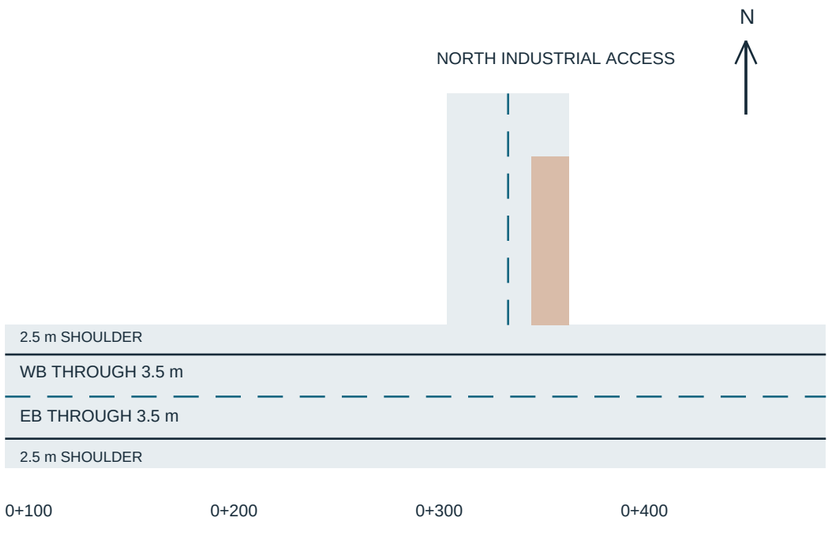

Figure 1 - Intersection arrangement (NTS)

DESIGN NOTES

Stage 1: establish temporary protection and work on the north access tie-in while maintaining the provincial through route. Stage 2: reconstruct one side of the intersection under a separately accepted traffic control arrangement.

Stage limits shown are schematic. Temporary speed, lane widths, device spacing, tapers and queue protection are not approved. Develop the detailed plan using the Alberta Traffic Accommodation in Work Zones 2025 manual and accepted site conditions.

Issue	Status
0 / 2026-09-22	Issued for review
Prepared / checked	JL / AK
Units	SI; elevations in metres

Reference: associated project memorandum and original standards

North Ridge Highway Intersection Upgrade

TA102 · Interfaces and hold points

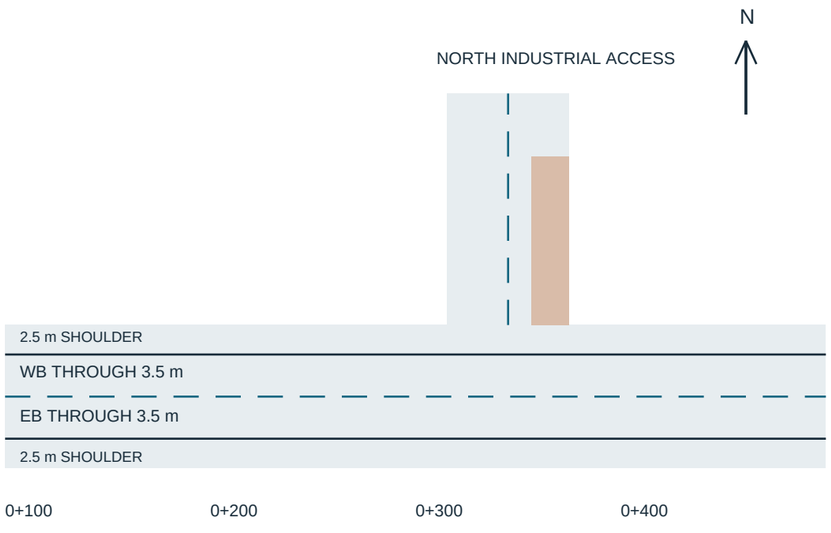

Figure 1 - Intersection arrangement (NTS)

DESIGN NOTES

Maintain emergency access and coordinate industrial deliveries before each stage. Check queues, sight lines, work-space protection, pedestrian needs and temporary drainage with the contractor and road authority.

Select applicable official typical drawings after the staging and speed basis are accepted. No government typical drawing, permit, traffic-control approval or professional authentication is reproduced in this concept.

Issue	Status
0 / 2026-09-22	Issued for review
Prepared / checked	JL / AK
Units	SI; elevations in metres

Reference: associated project memorandum and original standards